
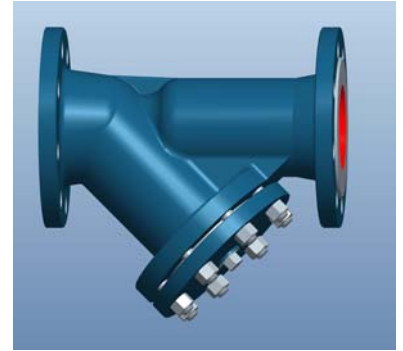


**Face to face : EN 558-1 Ser.1.**  
**Flange end : EN 1092-1.**  
**Test acc. : EN 12266-1**  
**Ta-Luft Gasket**  
**Body : 1.0619N /1.4408**



**FIG : 350**

**Page 1**



**FIG : 350**

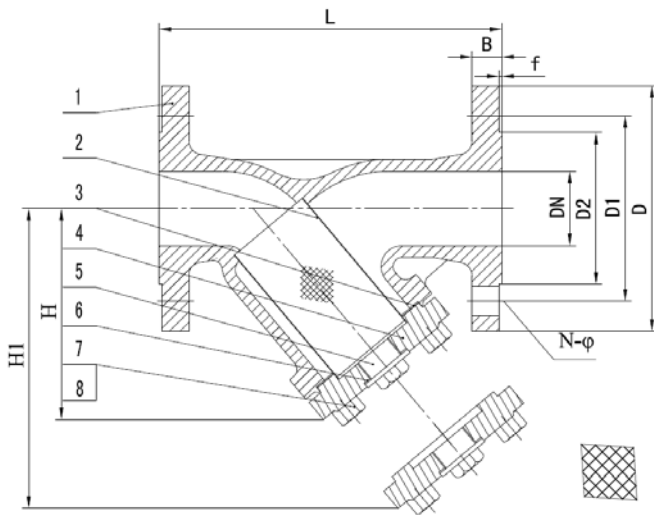


FIG.	Pressure	Material	Range
132.350	PN10	1.0619N	DN15-DN250
133.350	PN16	1.0619N	DN15-DN250
134.350	PN25	1.0619N	DN15-DN250
135.350	PN40	1.0619N	DN15-DN250
152.350	PN10	1.4408	DN15-DN250
153.350	PN16	1.4408	DN15-DN250
154.350	PN25	1.4408	DN15-DN250
155.350	PN40	1.4408	DN15-DN250

**Face to face : EN 558-1 Ser.1**  
**Flange end : EN 1092-1**  
**Test acc. : EN 12266-1**  
**TA-Luft Gasket**

**Material list**

NO.	Part	Material	
		FIG. 152.350 / 153.350 / 154.350 / 155.350	FIG. 132.350 / 133.350 / 134.350 / 135.350
1	Body	1.4408	1.0619N
2	Screen	1.4401	1.4301
3	Body seal	TA-Luft Gasket	TA-Luft Gasket
4	Bonnet	1.4408	1.0619N
5	Screw	1.4401	1.4006
6	Gasket	1.4401	1.4401
7	Bolts	A4	1.7225(GC)
8	Nuts	A4	1.1181(YK)

**Dimension List**

PN	DN	D	D1	D2	L	H	H1	N	Φ	B	f	Screen mesh (square)	Screen wire size	Filter holder (square)	Holder wire size	Weight (Kg)
10	200	340	295	268	600	420	620	8	22	24	3	0.8×0.8	Φ0.5	10×10	1×1	130.5
	250	395	350	320	730	495	720	12	22	26	3	0.8×0.8	Φ0.5	10×10	1×1	180.5
16	65	185	145	122	290	170	255	4	18	18	3	0.8×0.8	Φ0.5	10×10	1×1	15.5
	80	200	160	138	310	190	285	8	18	20	3	0.8×0.8	Φ0.5	10×10	1×1	22.5
	100	220	180	158	350	225	325	8	18	20	3	0.8×0.8	Φ0.5	10×10	1×1	31.5
	125	250	210	188	400	260	380	8	18	22	3	0.8×0.8	Φ0.5	10×10	1×1	41.5
	150	285	240	212	480	320	490	8	22	22	3	0.8×0.8	Φ0.5	10×10	1×1	65.5
	200	340	295	268	600	420	620	12	22	24	3	0.8×0.8	Φ0.5	10×10	1×1	130.5
25	250	405	355	320	730	495	720	12	26	26	3	0.8×0.8	Φ0.5	10×10	1×1	180.5
	200	360	310	278	600	420	620	12	26	30	3	0.8×0.8	Φ0.5	10×10	1×1	135.0
250	425	370	335	730	495	720	12	30	32	3	3	0.8×0.8	Φ0.5	10×10	1×1	180.5
	15	95	65	45	130	70	90	4	14	16	2	0.8×0.8	Φ0.5	/	/	3.3
40	20	105	75	58	150	80	110	4	14	18	2	0.8×0.8	Φ0.5	/	/	4.3
	25	115	85	68	160	88	120	4	14	18	2	0.8×0.8	Φ0.5	/	/	5.3
	32	140	100	78	180	100	135	4	18	18	2	0.8×0.8	Φ0.5	/	/	7.8
	40	150	110	88	200	125	165	4	18	18	3	0.8×0.8	Φ0.5	10×10	1×1	9.2
	50	165	125	102	230	140	195	4	18	20	3	0.8×0.8	Φ0.5	10×10	1×1	11.5
	65	185	145	122	290	170	255	8	18	22	3	0.8×0.8	Φ0.5	10×10	1×1	16.5
	80	200	160	138	310	190	285	8	18	24	3	0.8×0.8	Φ0.5	10×10	1×1	23.0
	100	235	190	162	350	225	325	8	22	24	3	0.8×0.8	Φ0.5	10×10	1×1	34.0
	125	270	220	188	400	260	380	8	26	26	3	0.8×0.8	Φ0.5	10×10	1×1	61.0
	150	300	250	218	480	320	490	8	26	28	3	0.8×0.8	Φ0.5	10×10	1×1	92.0
	200	375	320	285	600	420	620	12	30	34	3	0.8×0.8	Φ0.5	10×10	1×1	135.0
	250	450	385	345	730	495	720	12	33	38	3	0.8×0.8	Φ0.5	10×10	1×1	210.5

Edit: FengChunyan  
 Suzhou Fleu valve Co.Ltd  
 No.767 Huagang Road

Checking: WangHuanyu  
 Tel : 0086 512 63430669  
 Fax : 0086 512 63409789

Approved: ZWS  
 Date: 16.Mar.2017  
 E-mail : szsales@fleu-valve.com  
 http : //www.fleu-valve.com